Screens » Floor Screens



Collections: Alinta

Applications: Screens & Partitions



Screens » Floor Screens










Screens » Floor Screens





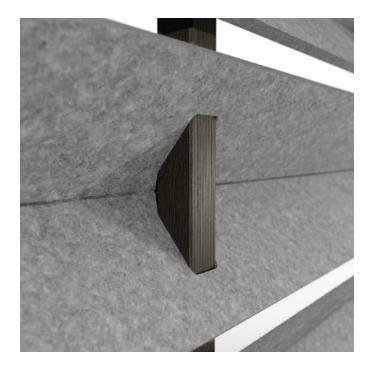

Screens » Floor Screens

Alinta Floor Screen is lightweight and easy to move. The horizontal spacing between the panels is designed to balance privacy, acoustics, and light.

✓ Absorbs Noise ✓ Easy Install ✓ Easy Clean

✓ Bleach Cleanable ✓ Acoustic

Description

The Alinta Floor Screen turns almost any open space into a workspace. It's V-fold gives a strong, angular aesthetic, while its lightweight construction makes it easy to move and create spaces wherever you need them. The design's horizontal spacing between the PET panels balances privacy, acoustics, and light.

This is highly configurable screen, comes in 61" and 72" heights and 48", 72" and 96" widths. All sizes come in 24 PET colors, 4 wood prints and the choice of blonde, dark, white, or black wood supports.

func., Alinta Floor Screens are easily cleaned with bleach and water.

Composition

Density 0.5 lb/ft² 2.4 kg/m²

PET Colours

Standard Finishes:

30 Solid Colors: Bark, Brick, Cadet, Chambray, Cobalt, Ecru, Elderberry, Fossil, Frost, Grass, Greige, Ivory, Linen, Malachite, Mandarin, Meadow, Midnight, Ochre, Olive, Parchment, Pebble, Pewter, Saffron, Sky, Slate, Smoke, Storm, Sunshine, Tar, Twilight.

4 Timber Prints: Eucalyptus, Iron bark, Merbau, Spotted Gum.

Premium Finishes:

12 Premium Wood Prints: Australian Walnut, Cherry, Claro Walnut, Euro Beech, Knotty Pine, Lace Wood, Maple, Palm Wood, Poplar, Redwood, Rustic Walnut, White Oak.

18 Premium Material Prints: Concrete Cast, Concrete Polished, Concrete Dark Tint, Raku Bone, Raku Luster, Raku Jade, Shale Light, Shale Medium, Shale Dark, Terracotta Sun Bleached, Terracotta Mission, Terracotta Antique, Terrazzo Light, Terrazzo Medium, Terrazzo Dark, Travertine Light, Travertine Medium, Travertine Dark.



Screens » Floor Screens

Material	 60% post-consumer recycled PET bottles. 35% pre-consumer recycled content from PET chips 5% bio-based Polylactic Acid (PLA)
Wood	BlondeDarkWhiteBlack
Dimensions	 48" (1220mm) w x 61" (1550mm) h x 15" (377mm) d 48" (1220mm) w x 72" (1829mm) h x 15" (377mm) d 72" (1829mm) w x 61" (1550mm) h x 15" (377mm) d 72" (1829mm) w x 72" (1829mm) h x 15" (377mm) d 96" (2439mm) w x 61" (1550mm) h x 15" (377mm) d 96" (2439mm) w x 72" (1829mm) h x 15" (377mm) d
Fire Rating	ASTM-E84 – Class A classification AS ISO 9705 – 2003 – Group 1 classification EN-13501 – B-s2-d0 classification
Made In	USA
Lead Time	4 weeks
Inclusions	Wood Supports, PET Panels
Assembly & Delivery	Flat pack delivery, minimal assembly required. See installation instructions for detail.



Screens » Floor Screens

Care Instructions

Dab func. with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.

For difficult stains, use a solution of household bleach (10% bleach / 90% water).

To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.

Always test in an inconspicuous area first and if you don't see the expected results, contact us.

Warranty

5-year warranty.

Additional Comments

To see how vivid the colors truly are, it's easy to request a sample through the "Request information" button on this page, or you can ask for one from your local sales guru.

How to Specify

- Select 1 x PET Color
- Select 1 x Wood Finish
- Refer Product Specification Guide



Screens » Floor Screens

Colour & Finish Options

func solid colors






Screens » Floor Screens



func timber print

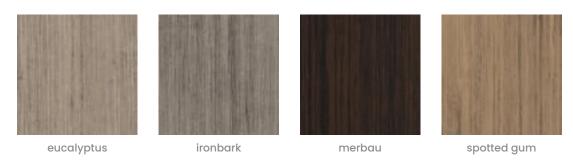

func premium material



Screens » Floor Screens




func premium wood



Screens » Floor Screens

func wood









White