Screens » Floor Screens




Collections: Alinta

Applications: Screens & Partitions



Screens » Floor Screens

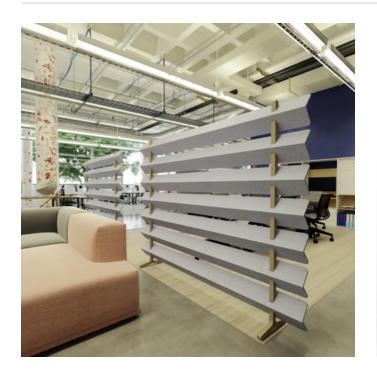








Screens » Floor Screens





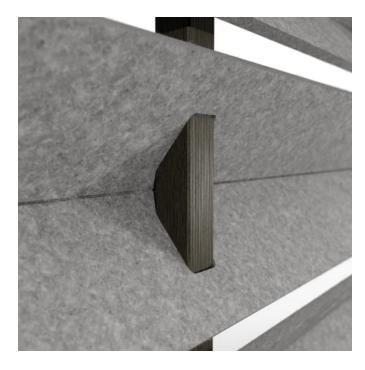

Screens » Floor Screens

Alinta Floor Screen is lightweight and easy to move. The horizontal spacing between the panels is designed to balance privacy, acoustics, and light.

✓ Absorbs Noise	Easy Install	✓ Easy Clean
✓ Bleach Cleanable	✓ Acoustic	
Description	The Alinta Floor Screen turns almost any open space into a workspace. It's V-fold gives a strong, angular aesthetic, while its lightweight construction makes it easy to move and create spaces wherever you need them. The design's horizontal spacing between the PET panels balances privacy, acoustics, and light.	
	0 ,	reen, comes in 61" and 72" heights and 48", 72" e in PET colors, prints and the choice of wood
	func., Alinta Floor Screens are	e easily cleaned with bleach and water.
How to Specify	Select 1 x PET Color	
	Select 1 x Wood Finish	
	• Refer Product Specification	Guide
Composition	Density 0.5 lb/ft² 2.4 kg /m²	
PET Colours	Refer to Color + Finish	
Material	60% post-consumer recycled PET bottles.	
	35% pre-consumer recycled content from PET chips	
	• 5% bio-based Polylactic A	cid (PLA)
Wood	Refer to Color + Finish	



Screens » Floor Screens

Dimensions	• 48" (1220mm) w x 61" (1550mm) h x 15" (377mm) d	
	• 48" (1220mm) w x 72" (1829mm) h x 15" (377mm) d	
	• 72" (1829mm) w x 61" (1550mm) h x 15" (377mm) d	
	• 72" (1829mm) w x 72" (1829mm) h x 15" (377mm) d	
	• 96" (2439mm) w x 61" (1550mm) h x 15" (377mm) d	
	• 96" (2439mm) w x 72" (1829mm) h x 15" (377mm) d	
Fire Rating	ASTM-E84 – Class A classification AS ISO 9705 – 2003 – Group 1 classification EN-13501 – B-s2-d0 classification	
Made In	USA	
Lead Time	4 weeks	
Inclusions	Wood Supports, PET Panels	
Assembly & Delivery	Flat pack delivery, minimal assembly required.	
	See installation instructions for detail.	
Care Instructions	Dab func. with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.	
	For difficult stains, use a solution of household bleach (10% bleach / 90% water).	
	To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.	
	Always test in an inconspicuous area first and if you don't see the expected results, contact us.	
Warranty	5-year warranty.	



Screens » Floor Screens

Additional Comments

To see how vivid the colors truly are, it's easy to request a sample through the "Request information" button on this page, or you can ask for one from your local sales guru.



Screens » Floor Screens

Colour & Finish Options

func solid colors





Screens » Floor Screens



func timber print




func premium material



Screens » Floor Screens



func premium wood

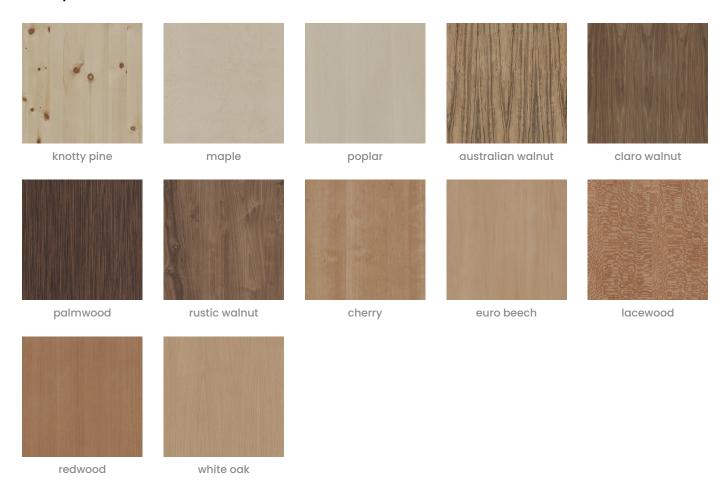

Screens » Floor Screens

func textile braid



func textile burlap





Screens » Floor Screens




func textile herring





Screens » Floor Screens

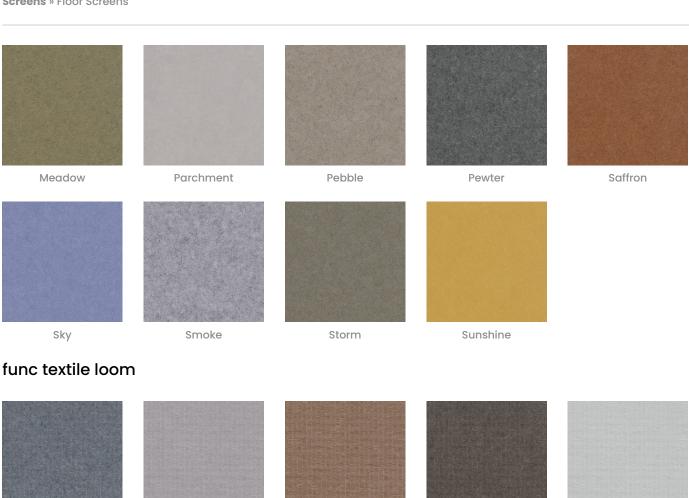




Cadet

























Pewter









Screens » Floor Screens










func wood









Blonde