Screens » Floor Screens




Collections: Mallee

Applications: Screens & Partitions



Screens » Floor Screens

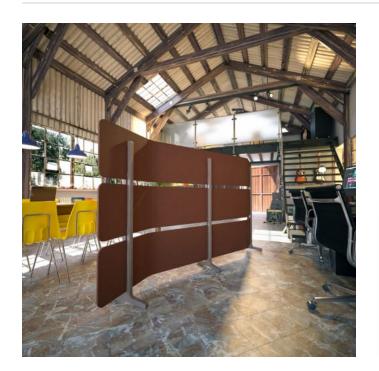








Screens » Floor Screens



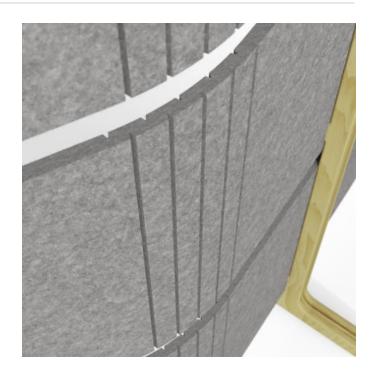



Screens » Floor Screens

Mallee Floor Screen is a high-design space creator that bends in 2 directions and is easy to move whenever and wherever you need it to.

Easy Install	Easy Clean
✓ Acoustic	
The Mallee Floor Screen is a high-design space creator that bends when you need it to.	
allow it to bend in a L, U or Z shap add stability; however you use it	easy to move, while the kerf cut sections be. The wide feet and solid wood support . With models available in 3 heights, 2 re's something there for everyone and
	llee Floor Screen ships quickly, comes flat le.
func., Mallee Floor Screens are ed	asily cleaned with bleach and water.
1. Select PET Color	
2. Select Wood Finish	
• Blonde	
• Dark Stain	
• White	
• Matt Black	
Refer to Color + Finish	
 60% post-consumer recycled PET bottles. 	PET bottles.
• 35% pre-consumer recycled o	content from PET chips
• 5% bio-based Polylactic Acid	(PLA)
Refer to Color + Finish	
	The Mallee Floor Screen is a high need it to. The lightweight design makes it allow it to bend in a L, U or Z shap add stability; however you use it widths, PET colors and prints, the almost anywhere. Manufactured in the USA, the Mapacked and is simple to assemb func., Mallee Floor Screens are ed. 1. Select PET Color 2. Select Wood Finish Blonde Dark Stain White Matt Black Refer to Color + Finish 60% post-consumer recycled 35% pre-consumer recycled of 5% bio-based Polylactic Acid



Screens » Floor Screens

Dimensions	• 60" (1524mm) w x 54" (1372mm) h x 15" (377mm) d
	• 60" (1524mm) w x 72" (1829mm) h x 15" (377mm) d
	• 84" (2134mm) w x 54" (1372mm) h x 15" (377mm) d
	• 84" (2134mm) w x 72" (1829mm) h x 15" (377mm) d
	• 108" (2744mm) w x 54" (1372mm) h x 15" (377mm) d
	• 108" (2744mm) w x 72" (1829mm) h x 15" (377mm) d
Fire Rating	ASTM-E84 – Class A classification AS ISO 9705 – 2003 – Group 1 classification EN-13501 – B-s2-d0 classification
Made In	USA
Inclusions	Wood Supports, PET Panels
Assembly & Delivery	Flat pack delivery, minimal assembly required.
	See installation instructions for detail.
Care Instructions	Dab func. with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.
	For difficult stains, use a solution of household bleach (10% bleach / 90% water).
	To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.
	Always test in an inconspicuous area first and if you don't see the expected results, contact us.
Warranty	5-year warranty.



Screens » Floor Screens

Additional Comments

To see how vivid the colors truly are, it's easy to request a sample through the "Request information" button on this page, or you can ask for one from your local sales guru.



Screens » Floor Screens

Colour & Finish Options

func solid colors





Screens » Floor Screens



func timber print




func premium material



Screens » Floor Screens



func premium wood

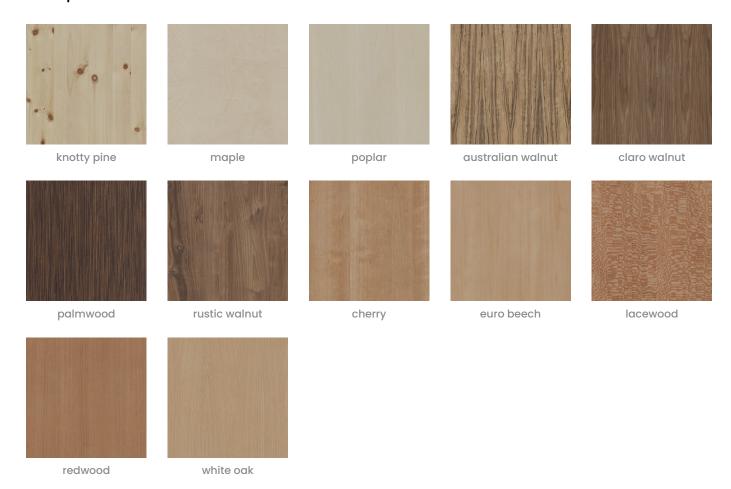



Screens » Floor Screens

func textile braid



func textile burlap






Screens » Floor Screens



func textile herring





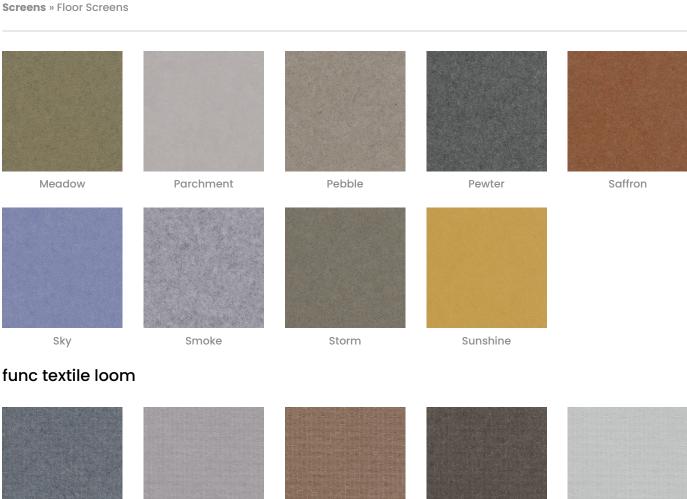





Chambray



























Meadow

Parchment

Pebble

Pewter

Screens » Floor Screens










func wood









Blonde