Screens » Suspended Screens



Collections: Bunji

Applications: Screens & Partitions














Bunji Closed



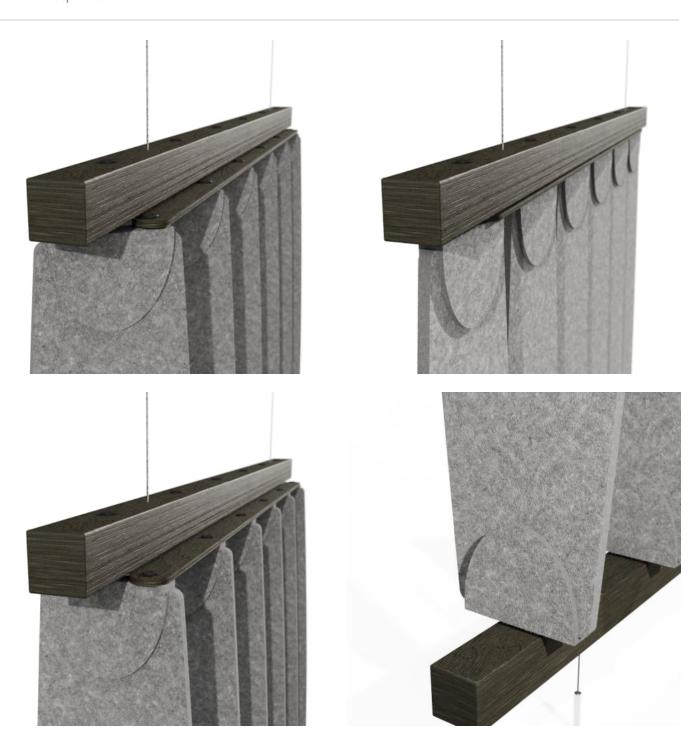









Screens » Suspended Screens

Bunji Rotating Screen is a contemporary suspended screen with louvers that easily open and close when you need to adjust privacy, light and sound.

Easy InstallAcoustic	✓ Easy Clean
,	contemporary suspended screen with oen and close.
The 101" height with variable widths, and adjustable ceiling mount, make it work in spaces up to 13 ft high and 8 ft wide, while it's modern design offers an engaging and more flexible alternative to traditional walls. Available in PET colors and prints, this is an excellent option when you're after semipermanent, acoustically minded space division or room creation.	
	Bunji Rotating Screen ships quickly, comes flat mble.
func., Bunji Rotating Screens a	re easily cleaned with bleach and water.
Select 1 x PET Color	
Black or White Powder Coat	ONLY
Density 0.5 lb/ft² 2.4 kg /m²	
Refer to Color + Finish	
60% post-consumer recycled PET bottles.	
• 35% pre-consumer recycle	d content from PET chips
• 5% bio-based Polylactic Ac	id (PLA)
Black and White ONLY	
	The Bunji Rotating Screen is a sustainable PET louvers that of The 101" height with variable w work in spaces up to 13 ft high an engaging and more flexible PET colors and prints, this is an permanent, acoustically mind Manufactured in the USA, the Epacked, and is simple to asser func., Bunji Rotating Screens a • Select 1 x PET Color • Black or White Powder Coate Density 0.5 lb/ft² 2.4 kg /m² Refer to Color + Finish • 60% post-consumer recycles • 35% pre-consumer recycles • 5% bio-based Polylactic Acte



Dimensions	 48" (1220mm) w x 101" (2566mm) h x 10" (235mm) d 96" (2439mm) w x 101" (2566mm) h x 10" (235mm) d
Fire Rating	ASTM-E84 – Class A classification AS ISO 9705 – 2003 – Group 1 classification EN-13501 – B-s2-d0 classification
Made In	USA
Lead Time	4 weeks
Inclusions	PET Blades, Cable System, Hardware
Assembly & Delivery	Flat pack delivery, minimal assembly required. See installation instructions for detail.
Care Instructions	Dab func. with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.
	For difficult stains, use a solution of household bleach (10% bleach / 90% water).
	To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.
	Always test in an inconspicuous area first and if you don't see the expected results, contact us.
Warranty	5-year warranty.
Additional Comments	To see how vivid the colors truly are, it's easy to request a sample through the "Request information" button on this page, or you can ask for one from your local sales guru.



Screens » Suspended Screens

Colour & Finish Options

func solid colors





Screens » Suspended Screens




func timber print



func premium material



Screens » Suspended Screens

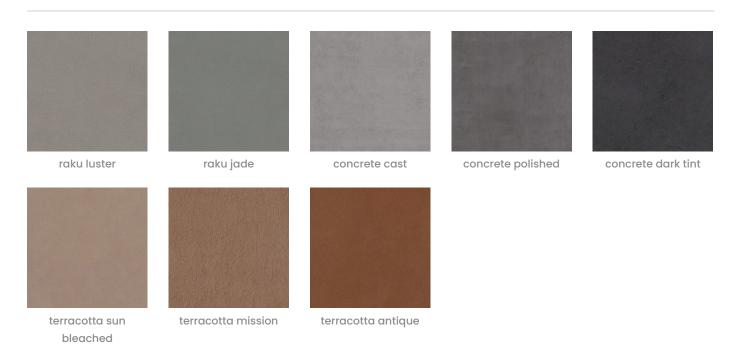

func premium wood



Screens » Suspended Screens

func textile braid



func textile burlap





Screens » Suspended Screens




func textile herring





Screens » Suspended Screens

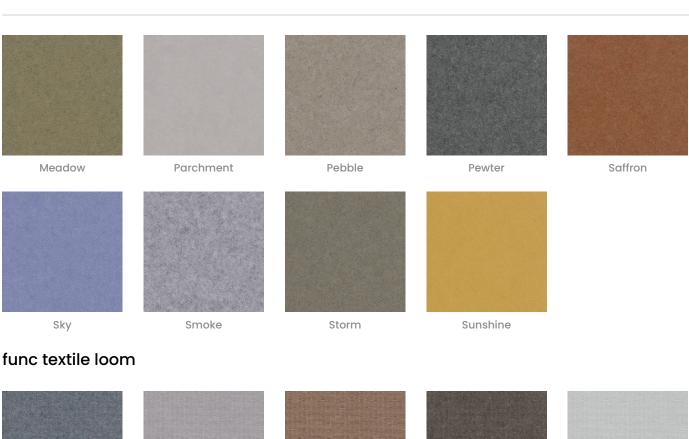





Saffron

Meadow

Parchment

Pebble

Pewter

Screens » Suspended Screens



func powdercoat



