
Walls » Freestanding Walls




Collections: Cooee Spaces, Cooee



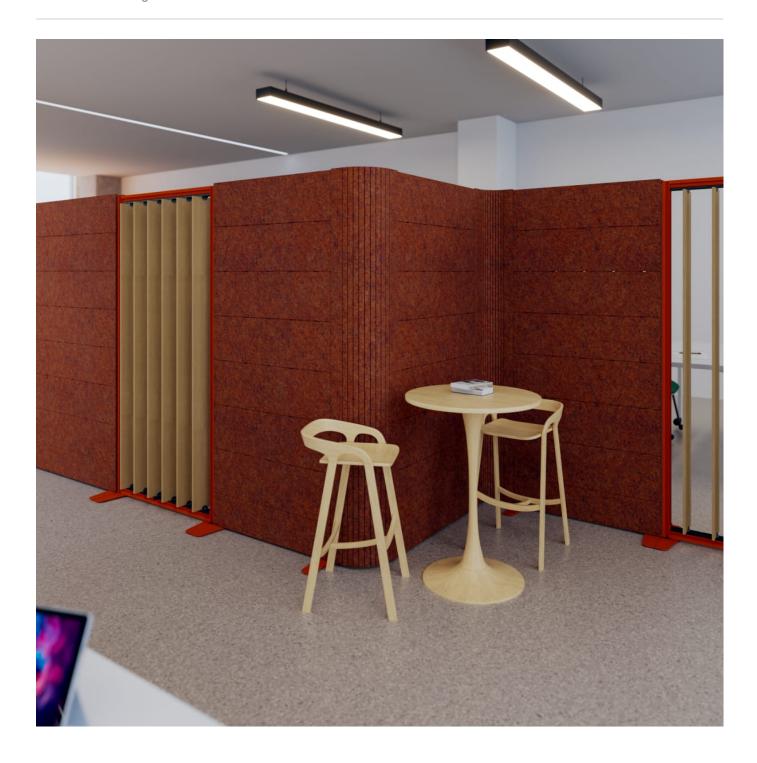


Cooee Spaces Corner - Olive Fern

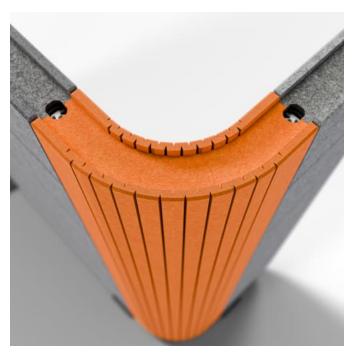

Cooee Spaces Corner




Cooee Spaces Corner - Persepctive

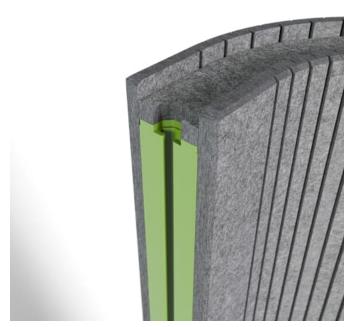

Cooee Spaces Corner - Extrusion Detail



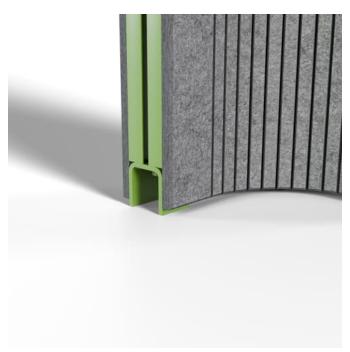

Cooee Spaces Corner - Foot Detail



Cooee Spaces Corner - Foot Channel Detail

Walls » Freestanding Walls

Designed for flow and flexibility, the Corner Unit seamlessly joins panels to form right angles—perfect for creating L-shaped or U-shaped zones.

✓ Absorbs Noise	✓ Acoustic	✓ Bleach Cleanable	
✓ Easy Clean	✓ Easy Install		
Description	Cooee Spaces Corner is designed for flow and flexibility—seamlessly joining walls at 90-degree angles to support L-shaped, U-shaped, or enclosed configurations. Whether you're defining zones for focus, collaboration, or quiet retreat, the Corner brings structure to modular layouts without compromising openness or continuity.		
	aluminium extrusion, and ac ensures visual and material yet essential component the reconfiguration in evolving s Like the rest of the 'Cooee Sp	aces collection', it's available in a selection of	
	powder coat finishes to coordinate with your chosen wall system and project palette.		
How to Specify	Select 1 x PET Color		
	Select 1 x Powder Coat Finish		
	Refer Product Specification (	Guide	
Composition	Density 0.5 lb/ft² 2.4 kg /m134		
PET Colours	Refer Color + Finishes		
Material	60% post-consumer recycle	d PET bottles.	
	35% pre-consumer recycled	content from PET chips	
	5% bio-based Polylactic Acid (PLA)		
	Accessories: Steel + PET inse	rt/liner with powder coat finish	
Powder Coat	Refer Color + Finishes		



Dimensions	10" (279 mm) w x 78" (1970 mm) h x 3" (75 mm) d	
Fire Rating	ASTM-E84 – Class A classification AS ISO 9705 – 2003 – Group 1 classification EN-13501 – B-s2-d0 classification	
Made In	USA	
Lead Time	8 weeks	
Assembly & Delivery	Flat pack delivery, minimal assembly required.	
	See installation instructions for detail.	
Care Instructions	Dab func. with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.	
	For difficult stains, use a solution of household bleach (10% bleach / 90% water).	
	To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.	
	Always test in an inconspicuous area first and if you don't see the expected results, contact us.	
Warranty	5-year warranty. Visit baresque.com.au/warranty for complete details.	
Additional Comments	To see how vivid the colors truly are, it's easy to request a sample through the "Request information" button on this page, or you can ask for one from your local sales guru	



Walls » Freestanding Walls

### **Colour & Finish Options**

#### func solid colors









Walls » Freestanding Walls

bleached

#### func premium wood



#### func timber print



func textile braid



Walls » Freestanding Walls



### func textile burlap






Walls » Freestanding Walls



### func textile herring





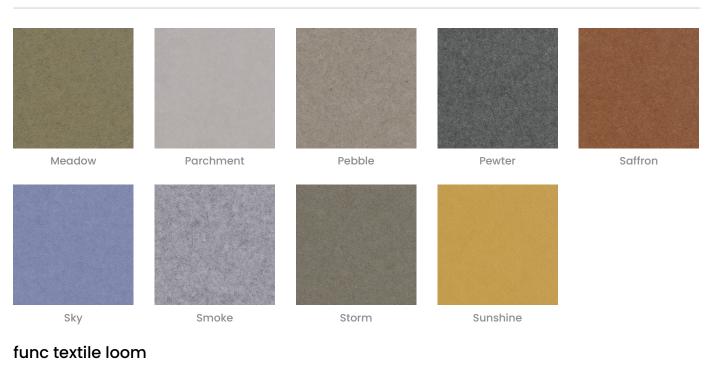



Walls » Freestanding Walls



### func powdercoat



